

# VBP6324

## Colour Fixed Dome



- CCD 1/3"
- Resolution 550 Lines
- Sensitivity 0.3 Lux
- Lens Size 4-9mm Varifocal
- Voltage 12V DC / 24V AC
- Power Consumption 200mA/2.4W (Max)
- Dimensions 100(Ø)x102(H)mm
- Weight Approx. 366g

Boasting an impressive 550TVL, the VBP6324 is a high resolution colour camera. Featuring a tri-axis gimbal to enable free rotation of the built-in 4-9mm vari-focal lens, this unit offers an effective surveillance solution for a variety of internal applications.

Whilst the VBP6324 is ideal for ceiling mount installations, the tri-axis gimbal allows free lens rotation making it particularly suitable for wall mounted applications also.

### Other Features

- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- Service Video Output
- Tri-Axis Gimbal



### VBP6324UTP Model

- Power and video can both be carried on a single CAT5 cable run
- Reduced cabling cost
- Less susceptible to interference
- 12V DC/24V AC
- 200mA/2.4W



Signal System	PAL : 625 Lines
Scanning System	2:1 Interlace
Sync. System	Internal
Image Sensor	1/3"
Total/Effective Pixels	470K/440K
Lens	DC Iris Vari-focal Lens (f=4~9mm)
Horizontal Resolution	550 TV Lines
Video S/N Ratio	More than 48dB (AGC Off)
Sensitivity	0.3 Lux
Electronic Shutter	1/50 ~ 1/10,000 sec.
White Balance	Auto
AGC	On/Off
BLC	On/Off
Flickerless	On/Off
Power	AC24V (20V - 28V) or DC12V (10V - 15V), 200mA/2.4W
Dimensions	100(Ø) x 102(H) mm

### Tri-Axis Gimbal

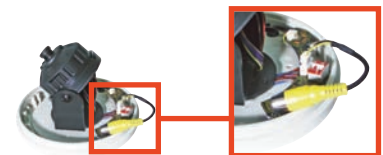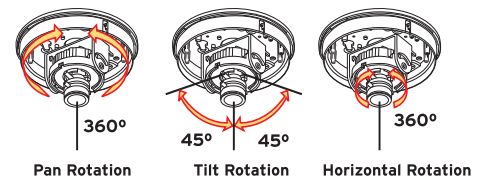

**Service Video Output**  
Enables test monitor to be connected direct to camera

