

VVP9314 / VVP9314UTP

Colour Vandal Resistant Dome Camera



- CCD 1/3"
- Resolution 550 Lines
- Sensitivity 0.3 Lux
- Lens Size 3.8mm
- Voltage 12V DC
- Power Consumption 150mA/1.8W(max.)
- Dimensions 100(Ø)x101(H)
- Weight Approx. 844g

Other Features

- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- IP65
- Service Video Out
- Tri-Axis Gimbal

VVP9314UTP Model

- Power and video can both be carried on a single CAT5 cable run
- Reduced cabling cost
- Less susceptible to interference
- 12V DC/24V AC
- 150mA/1.8W




The VVP range of vandal resistant dome cameras provide the ideal surveillance solution for monitoring areas that are prone to attack, such as prisons, schools and car parks.

Enclosed in a stylish vandal proof dome housing, the VVP range features a tri-axis gimbal to enable free rotation of the built in lens. With the ability to mount on the wall or ceiling and an on screen display menu, the VVP range can be installed virtually anywhere with ease.

	VVP9314	VVP9314UTP
Scanning System	2:1 Interlace	
Sync. System	Internal	
Image Sensor	1/3"	
Total/Effective Pixels	410K	
Lens	3.8mm Fixed Lens	
Horizontal Resolution	550 TV Lines	
Video S/N Ratio	More than 48dB (AGC Off)	
Sensitivity	0.3 Lux	
Electronic Shutter	1/50 ~ 1/10,000 sec.	
White Balance	Auto	
AGC	On/Off	
BLC	On/Off	
Service Video Output	Yes	
Power	DC 12V (9V ~ 15V)	12V DC / 24V AC
Dimensions	100(Ø) x 101(D) mm	

Tri-Axis Gimbal

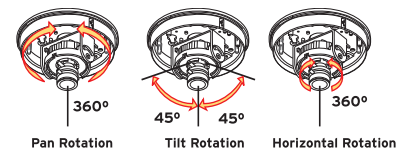

Service Video Output
Enables test monitor to be connected direct to camera

