

VVP9324 / VVP9324UTP

Colour Vandal Resistant Dome Camera



- CCD 1/3"
- Resolution 550 Lines
- Sensitivity 0.3 Lux
- Lens Size 4-9mm Varifocal
- Voltage 12V DC / 24V AC
- Power Consumption 250mA/3W(max.)
- Dimensions 100(Ø)x101(H)
- Weight Approx. 844g

Other Features

- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- IP65
- Service Video Out
- Tri-Axis Gimbal

VVP9324UTP Model


- Power and video can both be carried on a single CAT5 cable run
- Reduced cabling cost
- Less susceptible to interference
- 12V DC/24V AC
- 250mA/3W



The VVP range of vandal resistant dome cameras provide the ideal surveillance solution for monitoring areas that are prone to attack, such as prisons, schools and car parks.

Enclosed in a stylish vandal proof dome housing, the VVP range features a tri-axis gimbal to enable free rotation of the built in lens. With the ability to mount on the wall or ceiling and an on screen display menu, the VVP range can be installed virtually anywhere with ease.

Tri-Axis Gimbal

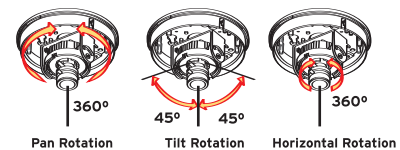

| | |
|------------------------|-----------------------------------|
| Scanning System | 2:1 Interlace |
| Sync. System | Internal |
| Image Sensor | 1/3" |
| Total/Effective Pixels | 470K/440K |
| Lens | DC Iris Vari-focal Lens (f=4-9mm) |
| Horizontal Resolution | 550 TV Lines |
| Video S/N Ratio | More than 48dB (AGC Off) |
| Sensitivity | 0.3 Lux |
| Electronic Shutter | 1/50 ~ 1/10,000 sec. |
| White Balance | Auto |
| AGC | On/Off |
| BLC | On/Off |
| Flickerless | On/Off |
| Power | 12V DC / 24V AC |
| Dimensions | 100(Ø) x 101(D) mm |



Service Video Output
Enables test monitor to be connected direct to camera

