

VVP9324DN / VVP9324DNUTP

Colour Mono Vandal Resistant Dome Camera



- CCD 1/3"
- Resolution 550 Lines
- Sensitivity Colour 0.3 Lux
- Sensitivity Mono 0.1 Lux
- Lens Size 2.9-10mm Varifocal
- Voltage 12V DC / 24V AC
- Power Consumption 420mA / 5W(max.)
- Dimensions 100(Ø)x101(H)
- Weight Approx. 844g
- Spectral Response 850nm

Other Features

- True Colour Mono (ICR)
- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- IP65
- Service Video Out
- Tri-Axis Gimbal

VVP9324DNUTP Model

- Power and video can both be carried on a single CAT5 cable run
- Reduced cabling cost
- Less susceptible to interference
- 12V DC/24V AC
- 420mA/5W





The VVP range of vandal resistant dome cameras provide the ideal surveillance solution for monitoring areas that are prone to attack, such as prisons, schools and car parks.

Enclosed in a stylish vandal proof dome housing, the VVP range features a tri-axis gimbal to enable free rotation of the built in lens. With the ability to mount on the wall or ceiling and an on screen display menu, the VVP range can be installed virtually anywhere with ease.

Scanning System	2:1 Interlace
Sync. System	Internal
Image Sensor	1/3"
Total/Effective Pixels	410K
Lens	DC Iris Vari-focal Lens (f=2.9~10mm)
Horizontal Resolution	550 TV Lines
Video S/N Ratio	More than 48dB (AGC Off)
Sensitivity	0.3 Lux colour, 0.1 B/W
Electronic Shutter	1/50 ~ 1/10,000 sec.
White Balance	Auto
AGC	On/Off
BLC	On/Off
Flickerless	On/Off
Day&Night	Auto
Service Video Output	Yes
Power	DC 12V / AC 24V
Dimensions	100(Ø) x 101.1(D) mm

Tri-Axis Gimbal

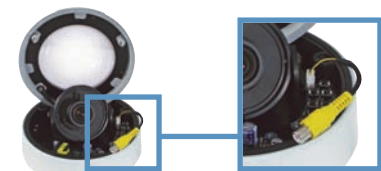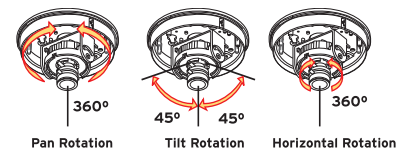

Service Video Output
Enables test monitor to be connected direct to camera

