

VVP9304

Vandal Resistant Dome Camera



The VVP range of vandal resistant dome cameras provide the ideal surveillance solution for monitoring areas that are prone to attack, such as prisons, schools and car parks.

Enclosed in a stylish vandal proof dome housing, the VVP range features a tri-axis gimbal to enable free rotation of the built in lens. With the ability to mount on the wall or ceiling and an on screen display menu, the VVP range can be installed virtually anywhere with ease.


■ CCD	1/3"
■ Resolution	380 Lines
■ Sensitivity	0.1 Lux
■ Lens Size	3.8mm
■ Voltage	12V DC
■ Power Consumption	150mA/1.8W(max.)
■ Dimensions	100(Ø)x101(H)
■ Weight	Approx. 844g

Other Features

- Auto White Balance
- Auto Gain Control
- Back Light Compensation
- Flickerless
- IP65
- Service Video Out
- Tri-Axis Gimbal
- 5 YEAR WARRANTY

Scanning System	2:1 Interlace
Sync. System	Internal
Image Sensor	1/3"
Total/Effective Pixels	270K
Lens	3.8mm Fixed Lens
Horizontal Resolution	380 TV Lines
Video S/N Ratio	More than 48dB (AGC Off)
Sensitivity	0.1 Lux
Electronic Shutter	1/50 ~ 1/10,000 sec.
White Balance	Auto
AGC	On/Off
BLC	On/Off
Service Video Output	Yes
Power	DC 12V (9V ~ 15V)
Dimensions	100(Ø) x 101(D) mm

Tri-Axis Gimbal

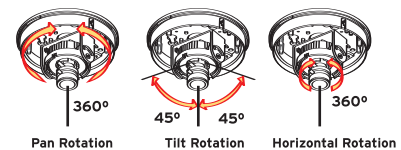

Service Video Output
Enables test monitor to be connected direct to camera

